


frogTerminal - The intercom, access & automation hub, reimagined

SIP Video Intercom · Decentralised RFID Access Control · Bluetooth/IP Automation · MOBOTIX MxMC integration, and a full open API for next-level building integrations.



frogTerminal S3+

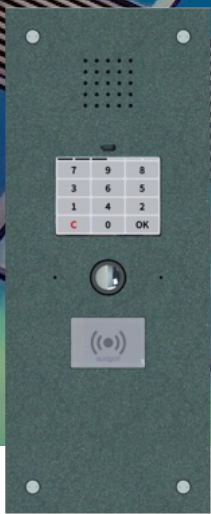

frogTerminal KS




Cutting-Edge Technology for Door Communication

Our flagship intercom, in machined aluminium, glass and stainless finishes – hardware designed for representative entrances. unites SIP video telephony, decentralised RFID access and Bluetooth/IP automation in one device. RFID plus personal PIN works without a network, with optional video verification for true 3-factor authentication. Crystal-clear audio with echo cancellation. Smartphones pair via frogCloud for calls, recordings, access rules and automation through the frogSIP and frogControl 2 apps.

Easy Upgrade for SIEDLE or MOBOTIX Solutions

Adapter variants make mechanical replacement of existing SIEDLE and MOBOTIX door stations straightforward. Full MxMC integration; special applications via frogLink and IP-Notify.

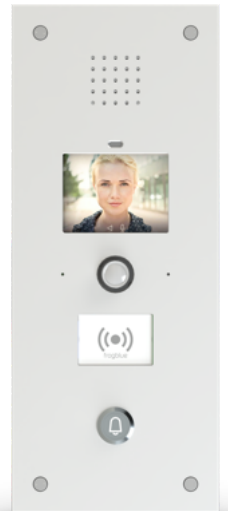

- **Truly decentralised** – every terminal autonomous, no central server, no IT cabinet
- **No cloud lock-in** – frogCloud is optional, never required
- **No single point of failure** – doors work even when the network is down; Bluetooth Mesh keeps the building alive
- **Premium hardware** – Solid materials, refined haptics, German engineering – hardware that belongs on a facade
- **Open API & ecosystem** – REST, MQTT, WebHooks, KNX, SIP – integrates with anything, never locks you in

Multi-Factor

RFID + PIN + Video Call

20 Zones

Per-project access control

8MP

180° hemispheric camera

5-8 W

PoE / 12-24 V DC / 24 V AC

What's New: 2026 Highlights!

frogCast® Unified Mesh

Real-time access & control distribution across BLE + IP - one mesh, no infrastructure.

Multi-SIP Server Support

Register simultaneously with multiple SIP servers - perfect for multi-tenant complexes.

Time Profiles

Rule-based On/Off scheduling with weekly programs & holiday/special date handling.

frogSIP App - iOS, Android, Mac

Telephony, door, light, recording & camera control - direct from your smartphone.

MOBOTIX MxMC Integration

Live video, two-way push-to-talk audio, pop-up events, door open & event review.

Time Tracking & Attendance

Check-in / check-out with API & export to your workforce management system.

The German Experts in Smart Buildings, Camera Technology, Energy Efficiency and Communication

frogblue AG • Luxemburger Strasse 6 • 67657 Kaiserslautern • info@frogblue.com • Tel: + 49 631 5208290



Built for everyone

For Installers

Fast on-site setup

- On-device wizard - language, network, mesh, cloud in minutes
- PoE 802.3af or 12-24 V DC / 24 V AC; Wi-Fi 2.4/5 GHz
- Surface or flush mount; standard Ø 68 mm back-box
- Web admin UI; full configuration backup & restore
- Works standalone - no server, no cabinet

For Integrators

Open, Extensible platform

- SIP, MQTT, JSON REST API, IP messages & WebHooks
- MOBOTUX MxMC, KNX, FRITZ!Box / FRITZ!Phone, SIP devices & servers
- Custom display interfaces - your branded UI
- Bluetooth Mesh + expansion options (Sensors, keypad, frog modules)
- Multi-tenant, multi-Terminal projects including Bluetooth Mesh projects

For End Users

Simple, Secure, Everywhere

- Door video call to smartphone, tablet or SIP phone
- RFID card, PIN or frogKey works on every door
- Open doors, control lights, access, recordings and more with frogSIP & frogControl Apps
- Real-time alerts for unauthorised access or visits when away.
- Multi-language UI - out of the box

frogTerminal model line-up



Ecosystem & Integrations

MOBOTIX MxMC

MxMC 2.9.2+ via MxEventStream (port 8035). Live video, two-way audio, open door, event review.

KNX

Direct KNX system events & actions linking access Events to building automation logic.

SIP & FRITZ!Box

Standards-based SIP, multi-server registration, and direct integration with FRITZ!Phone DECT.

Frogblue Mesh


frogRelay, frogDim, frogDALI, frogContact, frogLink - full Bluetooth Mesh automation.

Cloud & SaaS

frogCloud SIP, frogAccessControl, HTTP/WebHook outbound triggers.

Vario Modules

Fingerprint, time tracking, SIEDLE and MOBOTIX module support.

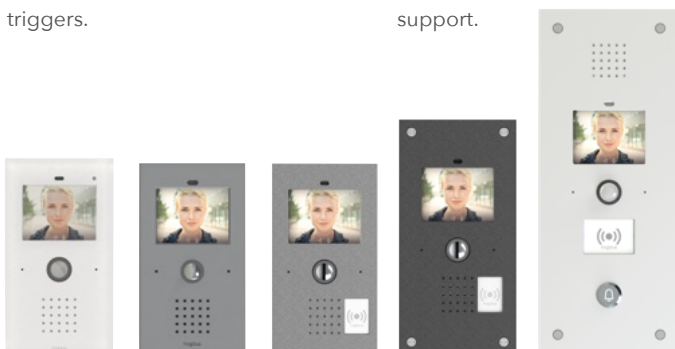

Glas Line KS-Line ALU-Line S2-Line S3-Line B1

Technical at a glance

Camera	8 MP, 180° hemispheric
RFID	Mifare DESFire EV2
Authentication	RFID + PIN + Video
Access zones	Up to 20 per project
Time profiles	Up to 15 per card
Network	1 Gbit Ethernet · Wi-Fi 2.4/5 GHz
Power	PoE 802.3af · 12-24 V DC · 24 V AC
Consumption	5-8 W (≈5 W standby)
I/O	2 inputs · 1 relay · USB-C
Dimensions	186 × 103 × 35.3 mm · 360 g
Back-box	Ø 68 mm · DIN 49073-1
Recording	Event · pre/post snapshots
Languages	20+ UI languages

The German Experts in Smart Buildings, Camera Technology, Energy Efficiency and Communication