

frogConnect1-1

To discharge leakage current / residual voltage. Reduces the afterglow of certain LED lamps when switched off. For use with frogblue dimmers.



Technical Data

Category

Article designation	frogConnect1-1
Article number	SU-CO1-1.01
Assembly type	Recess-mounted (in device socket according to DIN 49073)


Functions and power

Inputs	0
Outputs	0
Outputs can be dimmed	-
Minimum Load	-
Maximum rated supply current	max. 6 A
Capacity	0.15 µF
Suitable loads	LED lamps
Output modes	-
Protection category	Conforms to IP20
Integrated logic module	-
Integrated configuration backup	-
Comfort and timer functions	-
Power measurement	-
Short circuit detection and notification	-

frogConnect

Dimensions and weight


Dimensions (L x B x H): 53 x 48 x 21 mm
Weight: 30 g

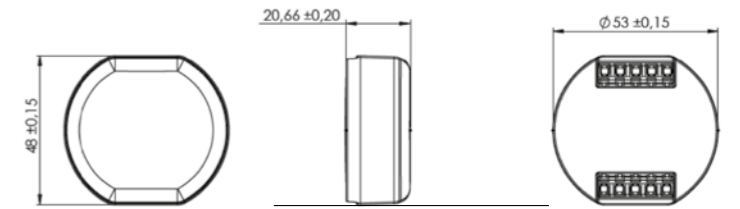

Connection example:

Socket depth min. 53 mm for installation behind switch insert
rec. 63 mm for installation behind switch insert

Individual installation is necessary for shallow depths.

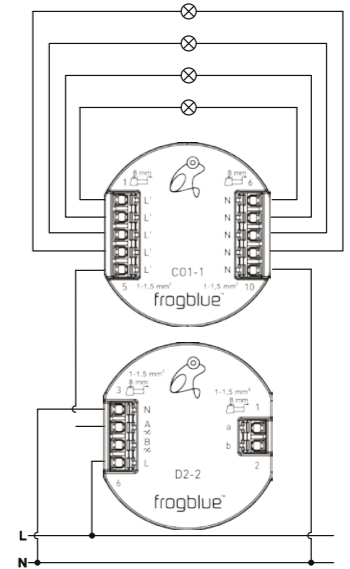

Electricity supply

Mains voltage	AC 110–240 V ~
Mains frequency	50 / 60 Hz

Network

WLAN	No
Bluetooth	No
Typical open field range	-

Operation and storage

Ambient temperature	25 ° to +55 °C
Storage temperature	-25 ° to +70 °C
Air humidity (during operation)	(Non-condensing)

Power connection

Type of contact	-
Connection variants	-
Connection type	Spring-type terminal (single wire)
Wire cross section	1–1.5 mm ² (rigid conductor recommended)
Stripping length	8 mm

Packaging

Packaging size	1 unit
EAN 1 unit	4260578530361
Packaging dimensions (L x W x H) 1 unit	75 x 30 x 75 mm
Weight including packaging 1 unit	50 g

frogblue_Data_EN_1-21_SU-CO1-1.01 01.21

Subject to change.
Electrical equipment may be installed and fitted only by qualified electricians.

Further information
www.frogblue.com.

